


Throttle Stop Installation Guide

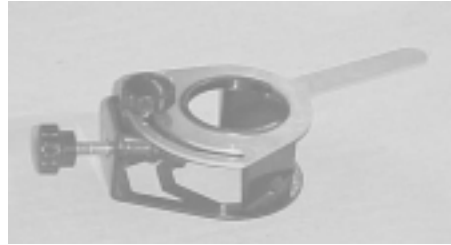

This manual is designed to help the user install the Atmospheric Sensing Module II.

Unpacking


Step 1

Remove the contents from the box.

Step 2

Verify the hardware contents as follows:

A- (1) Throttle Stop Assembly

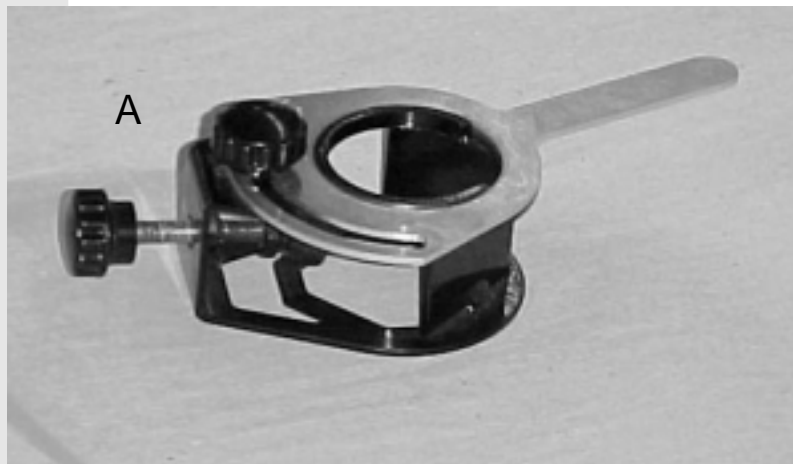


Installation

Warning: *The throttle stop should be installed while the motorcycle is NOT RUNNING and the ignition switch in the OFF position!*

Note: *Become familiar with the “Throttle Stop” operation before attempting to use it in conjunction with your Dynojet Dynamometer.*

Step 1

Install the Throttle Stop by sliding it over the Motorcycle’s handlebar grip.

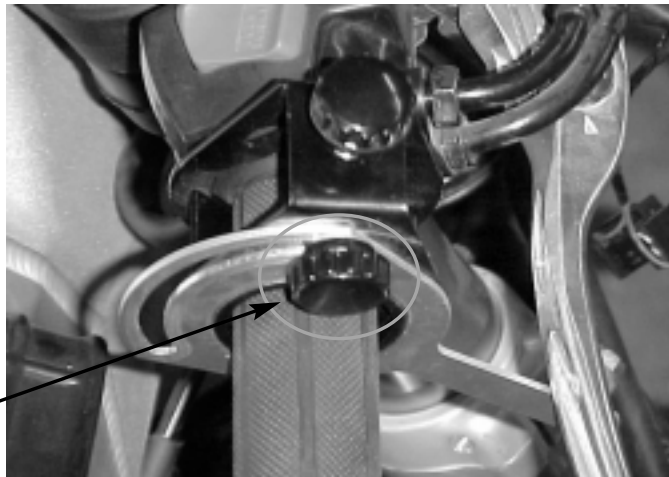

Fine Adjustment
Knob

- ◆ Loosen the “Fine Adjustment Knob” on the “Throttle Stop” and rotate it to its full counter clockwise position.
- ◆ Orient the aluminum “Throttle Stop” so that the “finger” is under the brake lever.

Step 2

Tighten the “Mounting Knob” to a point where it is secure on the grip.

Warning: *Do not overtighten the “Mounting Knob”, you could crush the throttle sleeve!*

Mounting Knob



Step 3

Loosen the “Fine Adjustment Knob” on the “Throttle Stop” and adjust it to your desired throttle position.

