

**4320.002**  
**1987~2006 Yamaha**  
**Banshee**  
**Stage 3**

**Stage 3**

For mildly tuned machines with the airbox removed and K&N individual air filters. May also be used with a good aftermarket exhaust system  
K&N Filter # RU-0210 (2)

<b><i>Parts List</i></b>		
2	Main Jet	DXP270
2	Main Jet	DXP280
2	Main Jet	DXP340
2	Fuel Needle	DNO304
2	Adjusting Washers	DW0001
2	E-Clips	DE0001

## STAGE THREE INSTRUCTIONS

4320.002

1. Unscrew the carb tops. Disconnect throttle cables and remove the slides. Remove needle retainers and stock needles(Fig.A).
2. Install Dynojet needles on groove #4 for applications below 5000 feet, groove #3 for above 5000 feet. The Dynojet washers are for half step adjustments and do not need to be installed at this time.
3. Remove stock main jets and replace with Dynojet main jets provided. Use the DXP270 with the stock exhaust. Use the DXP280 with an aftermarket exhaust. The DXP340 is for use with modified motors. Be sure that the jets you are changing are the main jets.
4. Locate the Air Screws (Fig.C). Using a flat blade screwdriver, turn the screws clockwise until it seats, then turn out 2.5 turns .

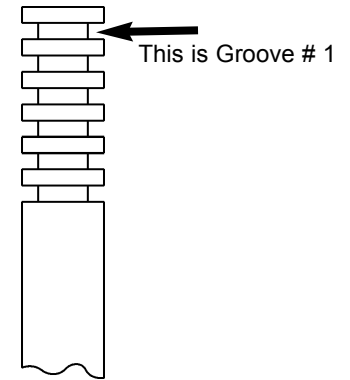


Fig.A



Fig.B


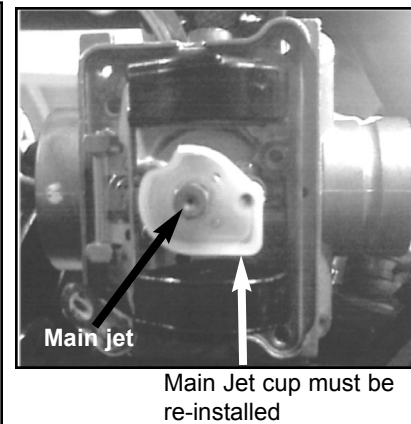


Fig.C

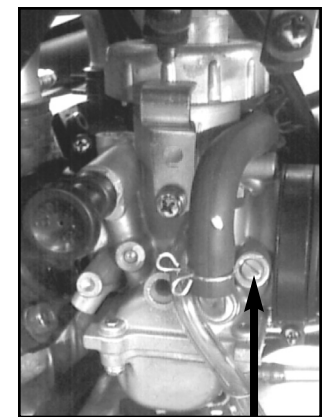

Air Screw