

Thank you for purchasing this Dynojet kit. This kit has been developed for a motorcycle which is set to the parameters listed at the right in the "Stage" description. If your motorcycle does not meet any of these parameters please check with Dynojet before installation. For technical assistance contact your Dynojet distributor or call Dynojet U.S.A. (800)-992-4993

2191 Mendenhall Dr. Suite 105  
 North Las Vegas, NV 89031  
 TEL: 702-399-1423  
 FAX: 702-399-1431  
 8am-5pm Pacific Time  
 Monday through Friday

Website Address  
<http://www.dynojet.com>

The manufacturer and seller make no warranties express or implied which extend beyond the description of the goods contained herein. Any description of this product is for the purpose of identifying it and shall not be deemed to create an express warranty.




**9201.001**

U.S. Models Only

1993-97 BMW F650

**Stage 2**

For mildly tuned machines using the stock airbox with the air intake snorkel removed. May also be used with a good aftermarket exhaust system

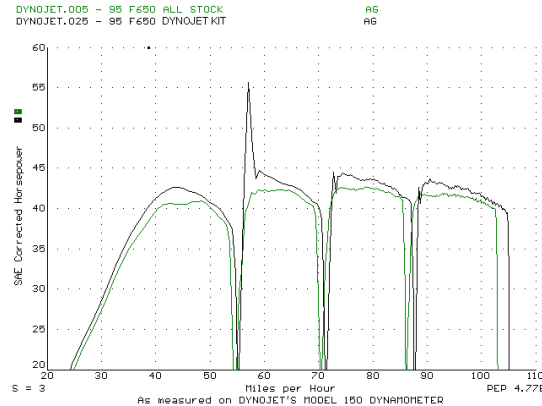

*This graph shows a typical gain with a Dynojet jet kit.*

# WARNING

**NO SMOKING!  
 NO OPEN FLAME!  
 WHILE INSTALLING  
 YOUR DYNOJET KIT**

## Parts List

2	Main Jets	DJ134
2	Main Jets	DJ138
2	Slide Springs	DSP007
2	Fuel Needles	DNO225
2	Adjusting Washers	DW0001
2	E-clips	DE0001
1	Plug Drill	DD #5/32
1	Screw	DS0001

## STAGE TWO INSTRUCTIONS

1. Remove the vacuum slide from the carbs. Remove the stock needles & spacers noting the order of assembly. Remove the air intake snorkel located on the side of the airbox.

2. Install the Dynojet slide springs (DSP007) in place of the stock slide springs.

3. Install the Dynojet needles on groove #2, using all stock spacers (Fig. A). Install the Dynojet washer above the E-clip.

4. Remove the stock main jets and replace with the Dynojet main jets provided. Use the DJ134 main jets with stock exhaust pipe, or use the DJ138 main jets with after market header or slip-on with high flowing baffles. Be sure that the jets you are changing are the main jets.

5. Locate the fuel mixture plug (Fig. B), if you see a screw head, proceed to adjusting procedure. With the DD #5/32 drill bit provided, carefully drill thru the plug(s). **Note:** the mixture screw is directly underneath this plug, be ready to pull back on the drill the instant you break thru. Use the screw provided to secure and remove the plug. Carefully turn the mixture screws clockwise until they seat, then back out 2 turns.

**DYNOJET**

9201.001




Fig. A

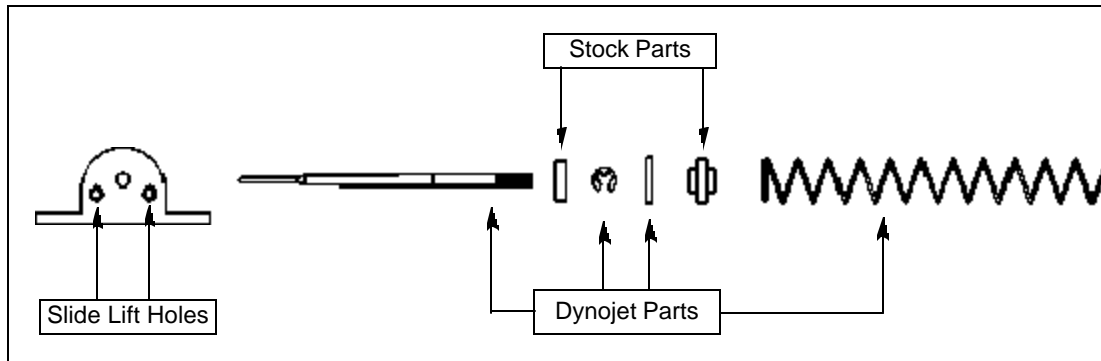


Fig. B

